

TELECOM RANGE



Model No. TEL 200F (12 Volts, 202 Ah at 8 hour Rate to 1.75 vpc)
Valve Regulated Lead acid Battery for communications
standby power applications

Innovative Features

- ◆ Completely maintenance free, sealed construction eliminates the need for watering
- ◆ Fully tank formed plates
- ◆ Analytical Grade electrolyte
- ◆ Spill proof / leak proof
- ◆ Valve regulated Max internal pressure 2.5 psi
- ◆ Multi-position usage
- ◆ ABS Case & Cover Flame Retardant meets UL 94 VO requirements
- ◆ Low self discharge
- ◆ FAA and IATA approved as non-hazardous
- ◆ Designed to comply with Bellcore TR-NWT-000766, Bellcore TR-NWT-000909, ANSI T1.330-1997, Telcordia SR 4228, British Standard BS 6290 Part 4, IEC 896 Part 2, Eurobat, DIN 43534
- ◆ UL Recognized, ISO 9001

Ampere Hour Capacity at 77°F (25°C) to 1.75 vpc

Discharge Time in Hrs	1	2	3	4	5	6	7	8	10
Ampere Hour Capacity	136.0	158.0	172.0	181.0	187.0	193.0	198.0	202.0	209.0



Website: www.hazebattery.com/usa
E mail : customerservice@hazebattery.com
Ph: 952-746-7528 Fax: 952-746-7527



AGM Range
Sealed Lead Acid 12 Volt Bloc



Haze Battery Company Ltd

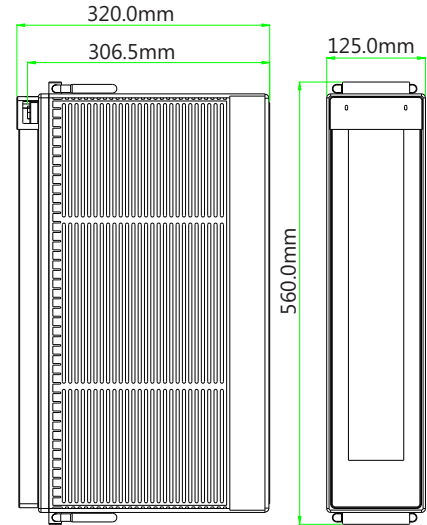

Specifications

Nominal Voltage		12V	
Nominal Capacity		220 Ah	C20
Dimensions	Total Height (Inc terminals)	12.60 inches	320 mm
	Length	n/a	n/a
	Width	22.05 inches	560 mm
	Weight	4.92 inches	125 mm
		129.3 lbs	58.5 Kg

Characteristics

Capacity 77°F (25°C) to 1.75 vpc	20 hour rate	220 Ah
	10 hour rate	209 Ah
	5 hour rate	187 Ah
	2 hour rate	158 Ah
	1 hour rate	136 Ah
	Internal Resistance	2.9 mOhms
Capacity correction for temperature Variations (C20)	Impedance	1700s
	104°F (40°C)	102%
	68°F (20°C)	100%
	32°F (0°C)	85%
Self Discharge 77°F (25°C)	5°F (-15°C)	65%
	Capacity after 1 month storage	98%
	Capacity after 3 months storage	94%
Max Charge Current 68°F (20°C)	Capacity after 6 months storage	86%
	45	
	Terminal	Standard
Charging (Constant Voltage)	Cyclic	2.40 vpc (59 -77°F)
	Float	2.27 - 2.30 vpc (59 -77°F)

End V per		Ampere Hour at 77°F (25°C)											
Cell	1 hr	2 hr	3 hr	4 hr	5 hr	6 hr	7 hr	8 hr	10 hr	12 hr	20 hr	24 hr	
1.85	120.0	139.0	151.0	159.0	165.0	170.0	174.0	178.0	184.0	188.0	194.0	196.0	
1.80	128.0	149.0	162.0	170.0	176.0	181.0	186.0	190.0	197.0	200.0	207.0	210.0	
1.75	136.0	158.0	172.0	181.0	187.0	193.0	198.0	202.0	209.0	213.0	220.0	223.0	
1.70	138.0	161.0	175.0	183.0	190.0	196.0	201.0	205.0	213.0	216.0	223.0	226.0	


End V per		Constant Amps Discharge - Amps at 77°F (25°C)											
Cell	1 hr	2 hr	3 hr	4 hr	5 hr	6 hr	7 hr	8 hr	10 hr	12 hr	20 hr	24 hr	
1.85	120.00	69.60	50.40	39.70	33.00	28.30	24.90	22.10	18.40	15.60	9.68	8.17	
1.80	128.00	74.30	53.90	42.50	35.20	30.20	26.60	23.60	19.70	16.70	10.30	8.73	
1.75	136.00	79.10	57.30	45.20	37.50	32.20	28.30	25.10	20.90	17.80	11.00	9.29	
1.70	138.00	80.30	58.20	45.80	38.00	32.60	28.70	25.50	21.30	18.00	11.20	9.43	

Specifications

Design Life	12 Years
Operating Temperature	-4 °F to 122 °F
Grid alloy	Calcium / Tin lead alloy
Plates	Flat Pasted
Separator	Absorbant Glass Mat
Active material	Very high purity lead
Charge Voltage	Float 2.27 - 2.30 VPC @77 °F Cyclic 2.35 @77 °F Max. 2.4 VPC Max ripple 0.05C (A)
Electrolyte	Sulphuric acid Analytical grade purity
Venting Valve	EPDM Rubber 1.5 to 2 psi (10.5 - 14 KPa) release pressure. Resealing at 1 psi (7 KPa)
Torque setting	The recommended torque value for all types is 44-62 inch-pounds

Terminal Details

Insert are made from brass with copper, nickel and silver plating giving excellent mechanical, electrical and corrosion resistant properties.



Haze Battery Company keenly encourages environmental awareness; PLEASE follow guidelines for the recycling /disposal of lead.

